JP2: IRQ SELECTOR

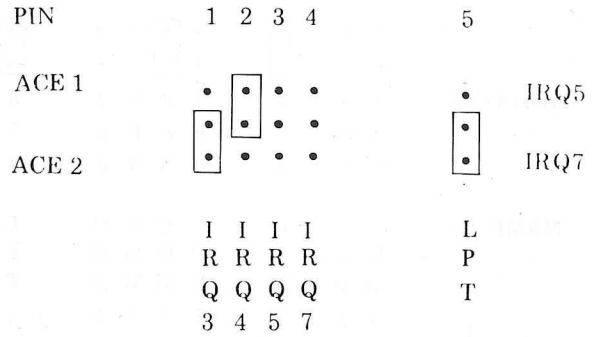

5. PIN ASSIGNMENT

ACE1, ACE2:

PIN	NAME
1	CD
2	RX
3	TX
4	DTR
5	GND
6	DSR
7	RTS
8	CTS
9	RI

LPT:

PIN	NAME
1	STROBE
2-9	D0-D7
10	ACK\
11	BUSY
12	PE
13	SCLT
14	AUTOFD\
15	ERROR\
16	INIT\
17	SLCTIN\
18-25	GND

User's Manual

2S/1P 451 CARD

* IBM PC/XT/AT™ are registered trade mark of IBM™ Corp.

1. INTRODUCTION

The 2S/1P 451 card is a mini size card for IBM PC/XT/AT and 386 system with two serial ports and one parallel port for connecting the system with serial and parallel devices, such as MODEM, mouse, digitizer, plotter and printer.

2. MAIN FEATURE

1. Two RS232 serial ports (one is optional).
2. One CENTRONIC parallel port.
3. Easy I/O address and IRQ setting.
4. All ports can be disabled.
5. Mini size for small case.
6. Low power consumption.

3. BOARD LAYOUT & A BRIEF DESCRIPTION

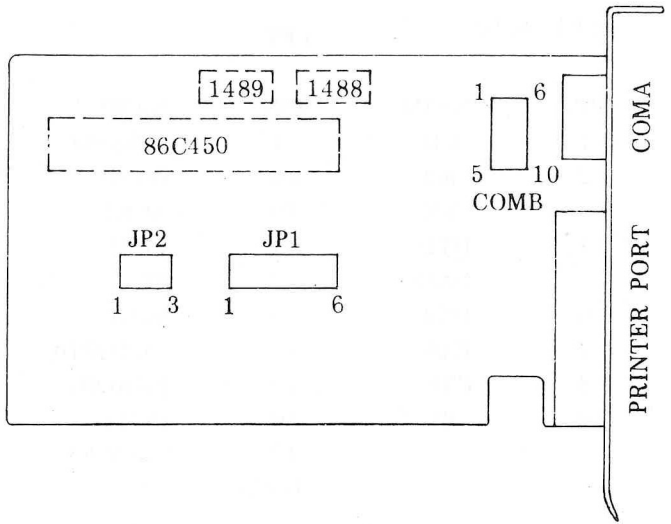

4. JUMPER SETTING

JP1: ADDRESS SELECTOR

PIN	1	2	3	4	5	6	7	8	9	10
	•	•	•	▪	•	▪	•	•	▪	•
	•	•	•	▪	•	▪	•	•	▪	•
ADDRESS	2	3	2	3	3	2	3	2	3	2
	E	E	F	F	F	F	E	E	7	7
	8	8	8	8	8	8	8	8	8	8
NAME	C	C	C	C	C	C	C	C	L	L
	O	O	O	O	O	O	O	O	P	P
	M	M	M	M	M	M	M	M	T	T
	4	3	2	1	1	2	3	4	1	2